


Propulsion - IMO Tier II / CCNR-2 / EU-3A
High speed - Engine

S6A3-MPTAW

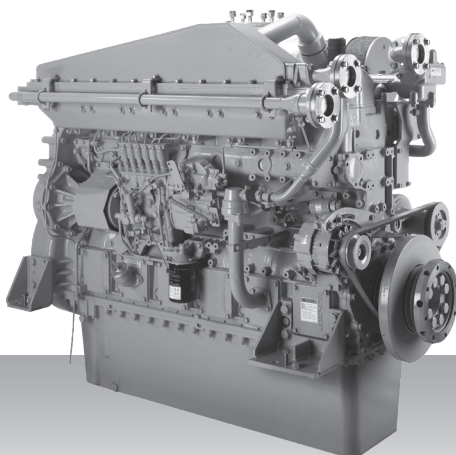

6-cylinder, 4-cycle, water cooled diesel engine,
with direct-injection, turbocharger and air-cooler.

Bore x stroke (mm) : 150 x 175

Displacement (l) : 18.56

Commercial rating

kW	bhp	rpm	Rating	Fuel cons. l/hr*	Emission
221	296	1,530	UCD	on request	IMO-T2
360	483	1,840	UCD	65.7	IMO-T2 / CCNR-2
385	516	1,800	MD	on request	CCNR-2

*Average fuel consumption according to ISO, see page 6.
Specifications / data subject to change without prior notice.

Product dimensions & dry weight

L (mm) : 1,636

W (mm) : 1,036

H (mm) : 1,421

Dry weight (kg) : 1,900

Dimensions and weight are based on standard configuration.