


**Propulsion - IMO Tier II / CCNR-2 / EU-3A  
High speed - Engine**

# S6B3-T2MPTAW

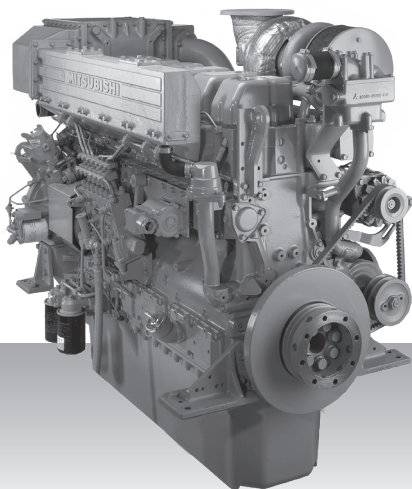

6-cylinder, 4-cycle, water cooled diesel engine,  
with direct-injection, turbocharger and air-cooler.

Bore x stroke (mm) : 135 x 170

Displacement (l) : 14.60

## Commercial rating

kW	bhp	rpm	Rating	Fuel cons. l/hr*	Emission
320	429	1,940	UCD	62.4	IMO-T2
350	469	2,000	HD	on request	IMO-T2

\*Average fuel consumption according to ISO, see page 6.  
Specifications / data subject to change without prior notice.

## Product dimensions & dry weight

L (mm) : 1,465

W (mm) : 873

H (mm) : 1,331

Dry weight (kg) : 1,300

Dimensions and weight are based on standard configuration.