


Propulsion - IMO Tier I / non emission
High speed - Propulsion package

S6B3-MPTK

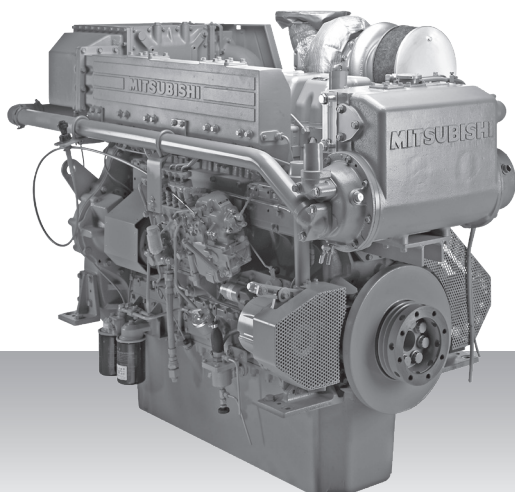

6-cylinder, 4-cycle, water cooled diesel engine,
with direct-injection, turbocharger, air-cooler,
build-up heat exchanger and sea water pump.

Bore x stroke (mm) : 135 x 170

Displacement (l) : 14.60

Commercial rating

kW	bhp	rpm	Rating	Fuel cons. l/hr*	Emission
345	463	1,940	UCD	on request	non emission
380	510	2,000	HD	on request	non emission

*Average fuel consumption according to ISO, see page 6.

Specifications / data subject to change without prior notice.

Product dimensions & dry weight

L (mm) : 1,967

W (mm) : 984

H (mm) : 1,330

Dry weight (kg) : 1,400

Dimensions and weight are based on standard configuration.