Propulsion - IMO Tier II / CCNR-2 / EU-3A
High speed - Engine

S12R-(Z3)MPTAW

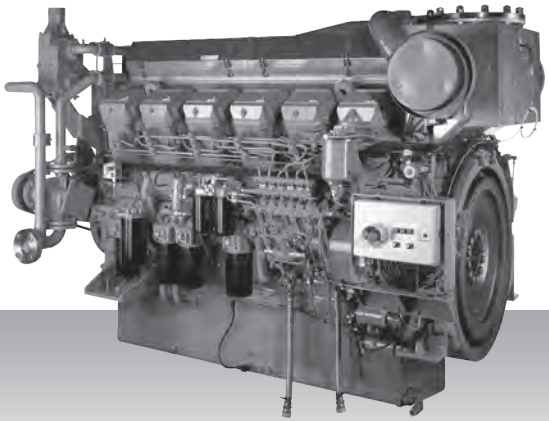

12-cylinder, 4-cycle, water cooled diesel engine,
wih direct-injection, turbocharger and air-cooler.

Bore x stroke (mm) : 170 x 180
Displacement (l) : 49.03

Commercial rating

kW	bhp	rpm	Rating	Fuel cons. l/hr*	Emission
588	789	1,400	UCD	on request	IMO-T2
696	933	1,500	UCD	on request	IMO-T2
749	1,004	1,500	UCD	on request	IMO-T2
749	1,004	1,600	UCD	on request	IMO-T2
940	1,261	1,600	UCD	160.5	IMO-T2 / EU-3A
1,040	1,395	1,650	HD	178.7	IMO-T2 / EU-3A

*Average fuel consumption according to ISO, see page 6.
Specifications / data subject to change without prior notice.

Product dimensions & dry weight

L (mm) : 2,416
W (mm) : 1,585
H (mm) : 1,807
Dry weight (kg) : 5,470

Dimensions and weight are based on standard configuration.