Propulsion - IMO Tier II / CCNR-2 / EU-3A
High speed - Engine

S16R-(Z3)MPTAW

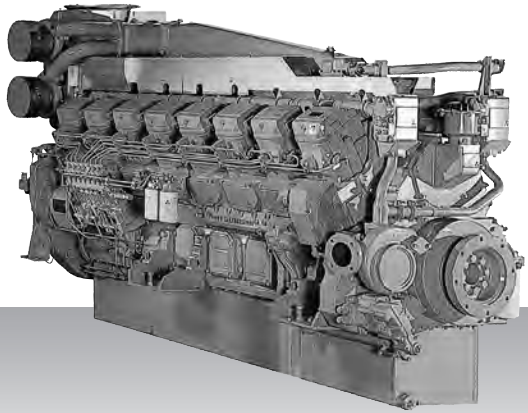

16-cylinder, 4-cycle, water cooled diesel engine,
wih direct-injection, turbocharger and air-cooler.

Bore x stroke (mm) : 170 x 180
Displacement (l) : 65.37

Commercial rating

kW	bhp	rpm	Rating	Fuel cons. l/hr*	Emission
1,250	1,676	1,600	UCD	214.1	IMO-T2 / EU-3A
1,380	1,851	1,650	HD	236.6	IMO-T2

*Average fuel consumption according to ISO, see page 6.
Specifications / data subject to change without prior notice.

Product dimensions & dry weight

L (mm) : 2,971
W (mm) : 1,585
H (mm) : 1,960
Dry weight (kg) : 6,950

Dimensions and weight are based on standard configuration.