


Propulsion - IMO Tier II / CCNR-2 / EU-3A
High speed - Propulsion package

S6A3-T2MPTK3

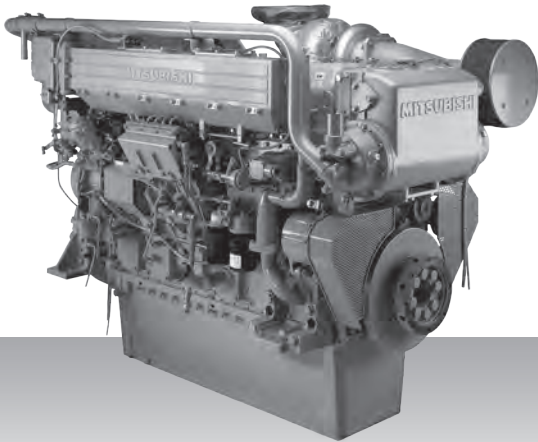

6-cylinder, 4-cycle, water cooled diesel engine,
with direct-injection, turbocharger, air-cooler,
built-up heat exchanger and sea water pump.

Bore x stroke (mm) : 150 x 175

Displacement (l) : 18.50

Commercial rating

kW	bhp	rpm	Rating	Fuel cons. l/hr*	Emission
502	673	1,900	HD	on request	IMO-T2
558	748	1,900	MD	on request	IMO-T2

*Average fuel consumption according to ISO, see page 6.
Specifications / data subject to change without prior notice.

Product dimensions & dry weight

L (mm) : 2,189

W (mm) : 1,127

H (mm) : 1,421

Dry weight (kg) : 2,100

Dimensions and weight are based on standard configuration.